


SCHEM. REF.*	OLD PART NO.	OLD VALUE	NEW PART NO.	NEW VALUE	SCHEM. REF. NO.	OLD PART NO.	OLD VALUE	NEW PART NO.	NEW VALUE
C-432	034-05B	.0004 5%	038-008	.001	C-437	034-101	.00056 5%	034-067	.0009 .50% 1%
C-433	034-081	.004 5%	035-020	.02	R-458	043-227	7.5 5%	041-095	10 5%
C-434	034-081	.004 5%	034-021	.0015	K-402				
C-435	034-058	.0004 5%	034-021	.0015	T-404			B-30044-10	
C-449			034-005	.00015 5%					
R-455	041-06B	47K	041-279	5.6K 1W 5%					
R-456	041-06B	47K	041-279	3.6K 1W 5%					
R-463			041-102	1K 1W 5%					

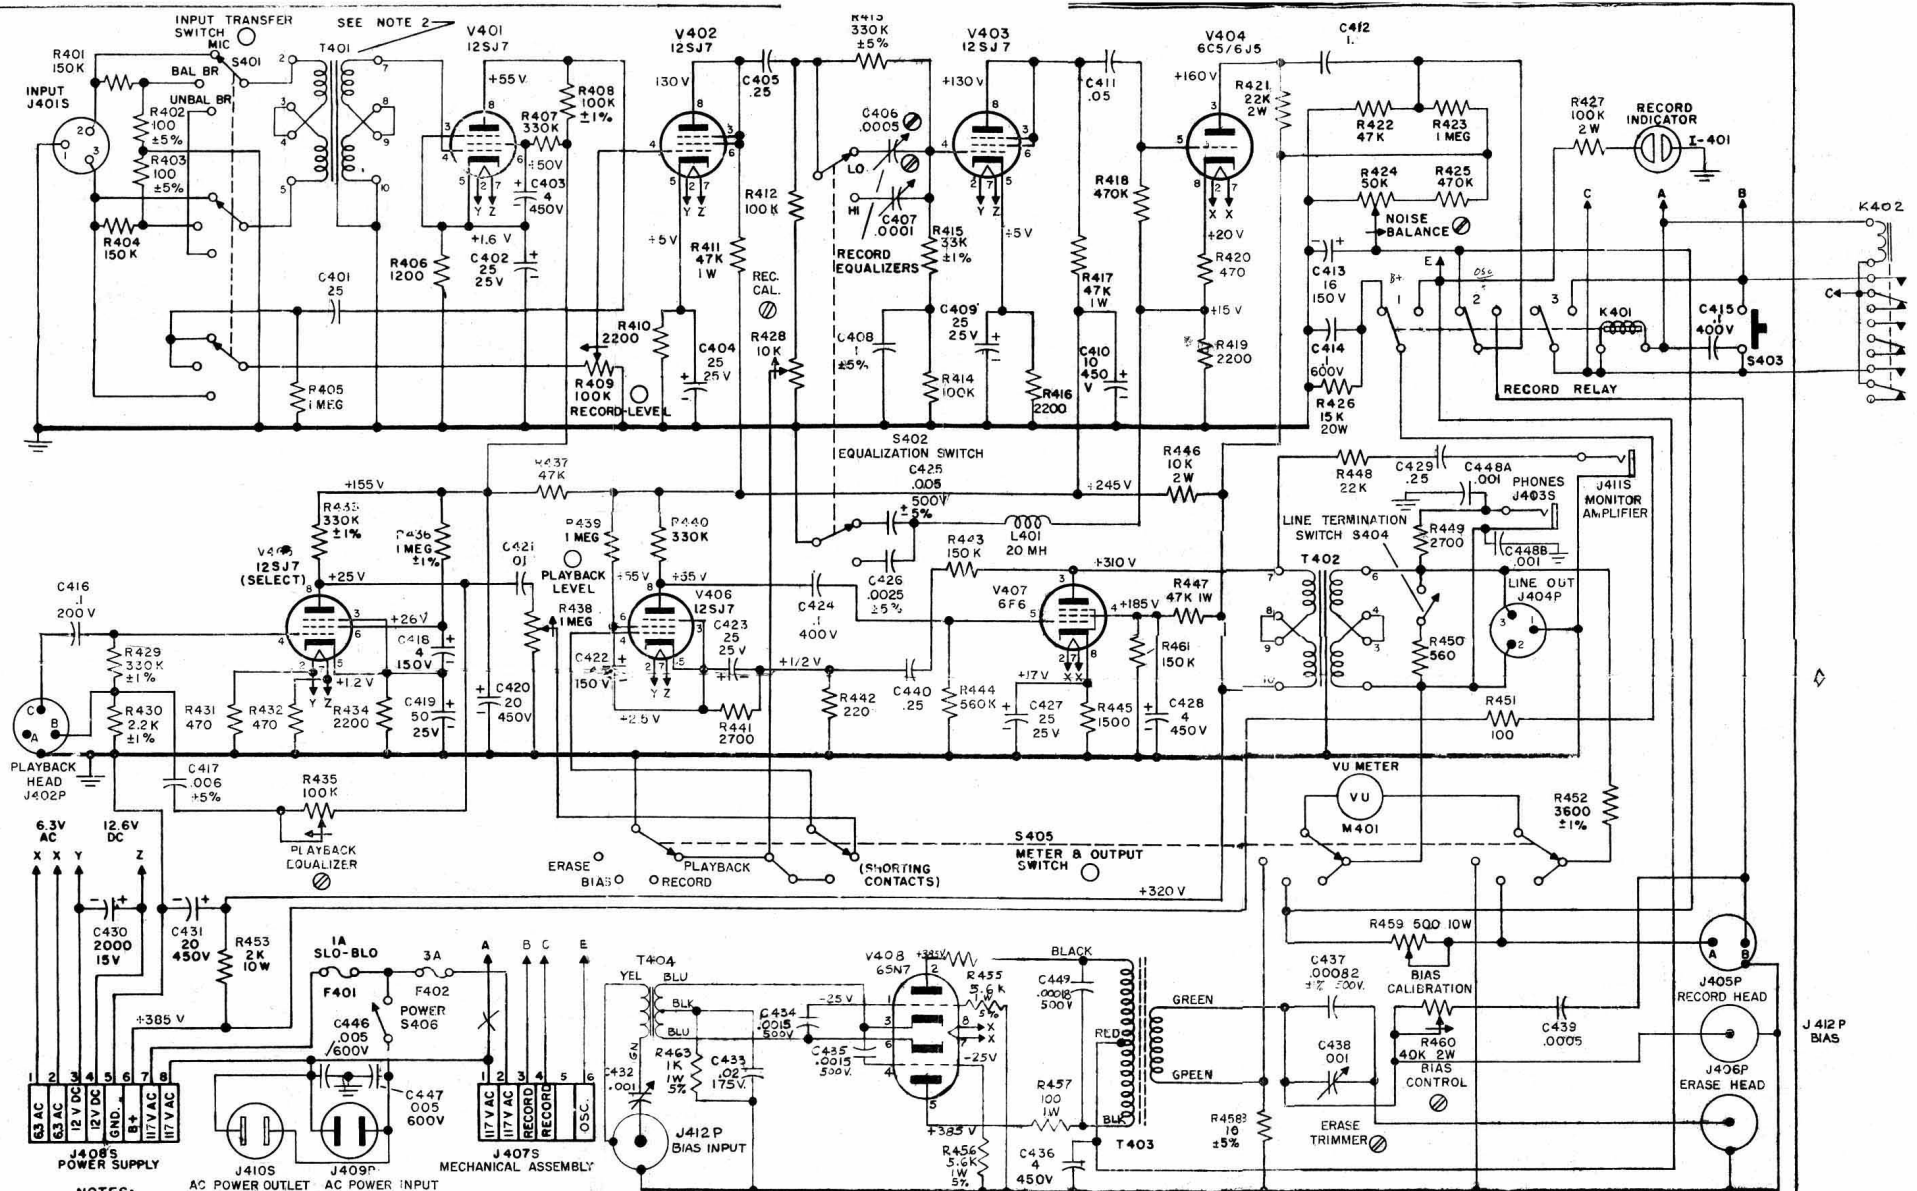

- NOTES:
1. ALL CAPACITIES IN MICROFARADS, & RATED 400 V UNLESS OTHERWISE SPECIFIED.
  2. FOR 30 & 50 OHMS MICROPHONE, SEE INSTALLATION.
  3. ALL VOLTAGES MEASURED WITH 20,000 OHMS PER VOLT METER WITH 117VAC LINE VOLTAGE. ALL READINGS EXCEPT V408 OSCILLATOR VOLTAGES TAKEN WITH K401 DE-ENERGIZED.
  4. ALL RESISTORS IN OHMS  $\pm 10\%$ , & RATED  $\frac{1}{2}$  WATT UNLESS OTHERWISE SPECIFIED.

ELECTRONIC ASSEMBLY  
 CATALOG NO. 5701R4-160  
 AMPEX ELECTRIC CORPORATION  
 REDWOOD CITY, CALIFORNIA

6. ○ FRONT PANEL CONTROL; ⊗ SCREWDRIVER ADJUSTMENT