


MR70 ground system mods

2006-03-18 JKC


- 1) XLR input: Remove shield from pin 1.
Tie pin 1 to chassis - same lug on TB102 as used for XLR output pin 1.
- 2) Cut green wire from front of main board near R61 to lug on 15 ips LF EQ switch.
- 3) Add wire from main board terminal 27 to ground lug near C150.
- 4) Dync Calib pot: remove black wire to shields of 2 cables connected to other 2 terminals of this pot.

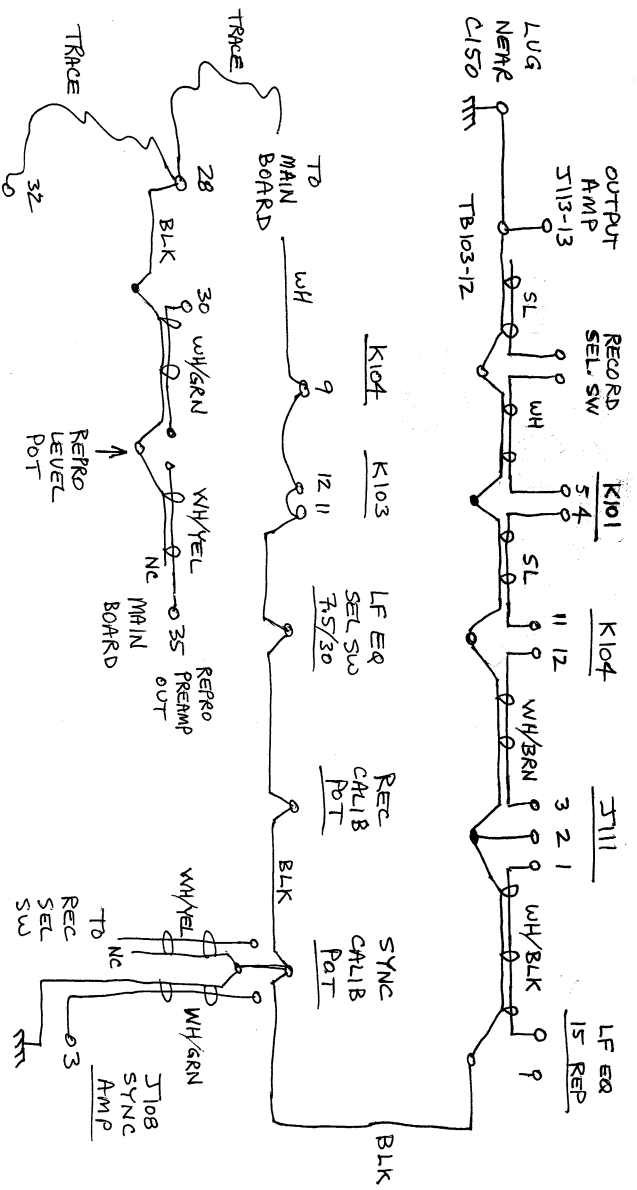

MR70 GROUND WIRING - REPRO

FROM INSPECTION OF CHASSIS 66162

JKC 2006-03-18

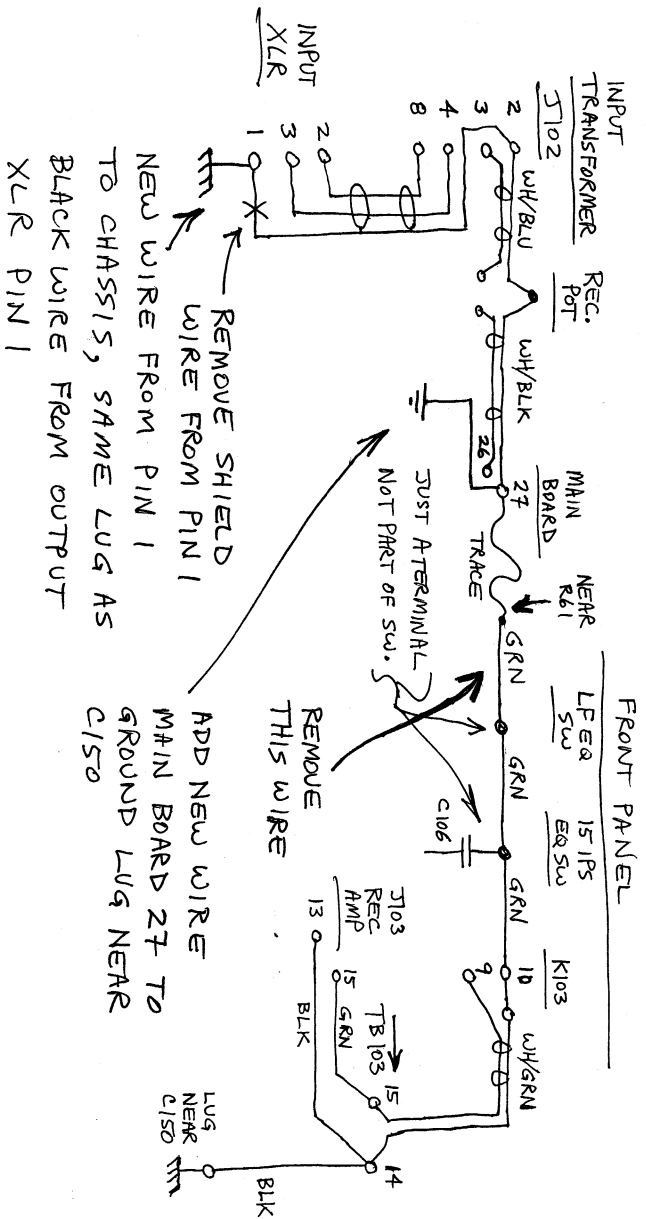

MRTD GROUND WIRING - RECORD

FROM INSPECTION OF CHASSIS 66162

JTC 2006-03-18

MODIFIED 2006-03-19